

04/20/99

Jc639 U.S.

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042

USA

(703) 205-8000

FAX: (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web http://www.bskb.com

TERRELL C. BIRCH
 RAYMOND C. STEWART
 JOSEPH A. KOLASCH
 JAMES M. SLATTERY
 BERNARD L. SWEENEY*
 MICHAEL K. MUTTER
 CHARLES GORENSTEIN
 GERALD M. MURPHY, JR.
 LEONARD R. SVENSSON
 TERRY L. CLARK
 ANDREW D. WEIKLE
 MARC S. WEINER
 JOE MCKINNEY MUNCY
 ROBERT J. KENNEY
 C. JOSEPH FARACI
 DONALD J. DALEY
 JOHN W. BAILEY
 JOHN A. CASTELLANO, III
 SENIOR COUNSEL:
 ANTHONY L. BIRCH
 OF COUNSEL:
 HERBERT M. BIRCH
 (1905-1996)
 ELLIOT A. GOLDBERG*
 WILLIAM L. GATES*
 EDWARD H. VALANCE
 RUPERT J. BRADY (RET.),*

*ADMITTED TO A BAR OTHER THAN VA

GARY D. YACURA
 THOMAS S. AUCHTERLO
 MICHAEL R. CAMMARATA
 JAMES T. ELLER, JR.*
 SCOTT L. LOWE
 JOSEPH H. KIM, PH.D.*
 RICHARD S. MYERS, JR.*
 MARY ANN CAPRIA
 MICHAEL J. CORNELISON*
 MARK J. NUEL, PH.D.
 ROBERT V. RACUNAS
 DARIN E. BARTHLOMEW*
 D. RICHARD ANDERSON
 PAUL C. LEWIS
 JERRY W. HOGGE

REG. PATENT AGENTS:
 FREDERICK R. HANDREN
 ANDREW J. TELESZ, JR.
 MARYANNE LIOTTA, PH.D.
 MAKI HATSUMI
 STEVEN P. WIGMORE
 ESTHER H. CHIN
 MIKE S. RYU
 W. KARL RENNER
 CRAIG A. McROBBIE
 GARTH M. DAHLEN, PH.D.
 LAURA C. LUTZ
 ROBERT E. GOCZNER, PH.D.
 HYUNG N. SOHN

1558 U.S. PTO
09/295273

04/20/99

Date: April 20, 1999
 Docket No.: 2927-0103P

Assistant Commissioner for Patents
 Box PATENT APPLICATION
 Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): SUMITOMO, Norio
 ONUKI, Masahide

For: GOLF CLUB SHAFT

Enclosed are:

- ☒ A specification consisting of 32 pages
☒ 10 sheet(s) of Formal drawings
☐ An assignment of the invention
☒ Certified copy of Priority Document(s)
☒ Executed Declaration ☐ Original ☒ Photocopy
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
☐ Preliminary Amendment
☐ Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	*****	*****	*****		****
	*****	*****	***** \$760.00	or	****
	*****	*****	*****		****
	*****	*****	*****		****
TOTAL CLAIMS	9 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	1 - 3 =	0	x78 =\$ 0.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 760.00				TOTAL \$ 0.00	

X A check in the amount of \$ 760.00 to cover the filing fee and recording fee (if applicable) is enclosed.

Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

_____ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By _____

JOSEPH A. KOLASCH

Reg. No. 22,463

P. O. Box 747

Falls Church, Virginia 22040-0747

Title of the Invention

Golf Club Shaft

Field of the Invention

This invention relates to an anisotropic golf club shaft and more particularly to a method of improving the strength of the anisotropic golf club shaft and enhancing productivity thereof.

Description of the Related Art

Needless to say, it is advantageous to hit a golf ball straight to get a good score and fly it a long distance. However, many golfers puzzle over the fact that golf balls hit are likely to be curved, i.e., they fly a so-called hook ball or a slice ball.

The golf ball is curved because the orientation of the orbit of a club head and the orientation (orientation of line normal to face of club head) of the face of the club head are not coincident with each other at an impact time. That is, when the face (orientation of line normal to face of the club head) of the club head is directed to the right with respect to the orbit of the club head, the golf ball is curved to the right (slice in the case of right-handed player), whereas when the face of the club head is directed to the left with respect to the orbit of the club head, the golf ball is curved to the left (slice in the case of right-handed player).

Thus, to fly the golf ball straight to an aimed direction, it is necessary to correct the orientation of the face of the club head at an impact time. Bu it is not easy to correct a swinging form. Thus, many players puzzle over how to correct their swinging forms.

In Japanese Laid-Open Patent Publication No. 3-227616, the present applicant describes that in a hollow or solid shaft having an anisotropic material such as fiber reinforced resin or the like formed at at least one part of the shaft, a fibrous angle of the anisotropic material is differentiated (varied) partly in a circumferential direction of the shaft and at at least one part of the shaft in the thickness direction thereof to differentiate the principal elastic axis of the shaft from the principal geometric axis. In this manner, the principal elastic axis can set at an arbitrary position.

In the hollow shaft in which the principal elastic axis is differentiated from the principal geometric axis to set it at an arbitrary position, when a load is so applied downward to the shaft that the load does not pass through a point located on the principal elastic axis, the hollow shaft is flexed and twisted, as shown in Figs. 15 and 16. That is, as shown in Fig. 15, supposing that one end of a hollow shaft 10 is denoted by a fixed end 10c and that the other end thereof is denoted by a free end 10d, a principal

elastic axis E is not coincident with a principal geometric axis G, and the free end 10d is positioned upward from a point Q located on the principal elastic axis E. When a load W not passing through the point Q located on the principal elastic axis E is applied to the free end 10d of the shaft 10, the shaft 10 is flexed and twisted, as shown in Fig. 16.

Further, the present applicant proposed a golf club to which a hollow shaft having the above-described anisotropic property is applied, as disclosed in Japanese Laid-Open Patent Publication No. 10-328338. According to the disclosure made therein, the shaft is twisted by the flexure thereof when the golf club is swung so that when a hooker or a slicer uses the golf club, the orientation (orientation of line normal to face of club head) of the face of the club head is self-corrected. In the golf club, the club head is installed on the end of the anisotropic shaft which is flexed and twisted such that a line normal to the face of the club head is oriented to the direction in which a golf ball is to be flied, i.e., the face of the club head is oriented to a specific direction owing to twisting of the shaft at a desired angle caused by flexure thereof which occurs when the golf club is swung.

In the above Japanese Laid-Open Patent Publication No. 10-328338, an anisotropic shaft is manufactured by

winding on a mandrel (a molding core rod) a semi-circumference prepreg in a region of $0^\circ \leq \theta < 180^\circ$ (first semi-circumference region) and in a region of $180^\circ \leq \theta < 360^\circ$ (second semi-circumference region) in the circumferential direction of the shaft, respectively such that reinforcing fibers of both prepregs incline in opposite directions with respect to the axial direction of the shaft. A plurality of layers each consisting of two semi-circumference prepregs inclining in opposite directions is wound on the mandrel to produce the anisotropic shaft. According to this method, an uncontinuous portion of the reinforcing fibers is formed in the boundary between the first semi-circumference region and the second semi-circumference region. Thus, the strength of the shaft is low at the uncontinuous portion. Further, two semi-circumference prepregs are used to form one layer. Thus, it takes long to manufacture the golf club shaft and further, there may be a variation in the characteristics of products. To solve the problems, the present applicant proposed a golf club shaft and a method of manufacturing the golf club shaft, as disclosed in Japanese Laid-Open Patent Publication No. 11-76480.

In the golf club shaft and the method of manufacturing the golf club shaft, a hoop layer whose reinforcing fibers are substantially perpendicular to the

axial direction of the shaft is layered on the boundary (uncontinuous portion of reinforcing fiber) between the first semi-circumference region consisting of one semi-circumference prepreg whose reinforcing fibers incline in one direction and the second semi-circumference region consisting of the other semi-circumference prepreg whose reinforcing fibers incline in the opposite direction. This is to prevent deterioration of the strength of the boundary therebetween. The two semi-circumference prepregs whose reinforcing fibers incline in opposite directions are bonded to the hoop layer to prepare a composite prepreg sheet in advance. The composite prepreg sheet is wound on the peripheral surface of the mandrel to manufacture the golf club shaft, thereby a period of time of manufacturing can be short and a degree of variation in the characteristics of products can be reduced.

However, in the proposal disclosed in Japanese Laid-Open Patent Publication No. 11-76480, it is possible to allow the strength and productivity of the shaft to be higher than those of the shaft not provided with the hoop layer. But the shaft has a seam (boundary between two semi-circumference prepregs) present in each layer, namely, in one turn of each layer consisting of the first and second semi-circumference prepregs. Thus, the strength of the shaft is still low.

It is ideal that the edges of the two prepregs are butted each other at the seam without forming a gap therebetween and overlapping them on each other. But it is difficult to butt them each other in such an ideal state in factories because they are operated for a mass production. Thus, there is necessarily a variation in the finish of the seam. In other words, in order to accomplish such an ideal butting of the prepregs, it is necessary for skilled operators to work without sparing any effort and time, which lowers the productivity of the shaft greatly. The above-described gap between the two prepregs and the overlapping thereof are defects of the shaft in its construction. Thus, in much consideration of the durability of the shaft, namely, such a defect cannot be ignored.

In the case of the conventional shaft (principal elastic axis and principal geometric axis are coincident with each other), in order to allow the shaft to have a uniform property in its circumferential direction, a prepreg is wound by at least one turn, without changing the material thereof. In the case of the anisotropic shaft, the semi-circumference prepreg is used. Thus, when the same amount of prepreg is used to manufacture the anisotropic shaft and the conventional shaft, the total number of prepregs to be used in the former is more than

that of prepregs to be used in the latter. Further, in the case of the anisotropic shaft, it is necessary to butt two prepregs each other for each circumference (turn), and the width of the semi-circumference prepreg is small, which makes it troublesome to handle it. Thus, the productivity of the anisotropic shaft is low.

Summary of the Invention

The present invention has been made in view of the above-described situation. It is an object of the present invention to improve strength and productivity of an anisotropic golf club shaft which can be flexed and twisted by differentiating its principal elastic axis and principal geometric axis from each other, then can be used preferably by the hooker or slicer.

In order to achieve the object, there is provided a golf club shaft having a plurality of fiber reinforced resinous layers which are layered one upon another in a winding state,

wherein one or more layers of said layers are inclined fiber reinforced resinous layers in which reinforcing fibers are oriented at angles not 0° and 90° with respect to an axis of said golf club shaft and, at least one layer of said inclined fiber reinforced resinous layers is wound by an unintegral turns more than one turn so as to apply an anisotropic property to the shaft.

When a fiber reinforced resinous layer (prepreg) whose reinforcing fibers incline with respect to the axis of the shaft is wound, let it be supposed that the number of turns thereof is "X+Y" (X is an integer more than 1 (one turn), Y is a value more than 0 and less than 1). In this case, a part of the entire fiber reinforced resinous layer (prepreg) wound by X turns, namely, by an integral number of times in a semi-circumference region ($0^\circ \leq \theta < 180^\circ$) and a part of the entire fiber reinforced resinous layer wound by the integral number of times in a circumference region ($180^\circ \leq \theta < 360^\circ$) are symmetrical with respect to the axis of the shaft, and the reinforcing fibers incline in the same direction with respect to the axis of the shaft. But the fiber reinforced resinous layer (prepreg) wound at Y turns forms a part in which the orientation of the reinforcing fiber thereof is different from that of the reinforcing fibers of the other parts not only in the circumferential direction of the shaft but also in the thickness direction thereof.

Accordingly, in the golf club shaft of the present invention having the above-described construction, the angle of the reinforcing fiber is partly different from that of the reinforcing fiber of the other parts in the circumferential direction of the shaft and further, at least one part in the thickness direction thereof. Thus,

the shaft is flexed and twisted.

In the golf club shaft of the present invention, as the part of the fiber reinforced resinous layer wound by X turns and the part of the fiber reinforced resinous layer wound by Y turns are composed by one prepreg sheet. Thus, the shaft of the present invention is formed without an uncontinuous portion between the part wound by X and the part wound by Y. Therefore, the shaft has a higher degree of strength than the conventional anisotropic shaft which is composed of the semi-circumference prepregs. Further, because the prepreg of the present invention has one circumference or more, i.e., it is wound by one turn or more, the number of the prepregs of the shaft of the present invention is smaller than that of the prepregs of the conventional anisotropic shaft formed of the semi-circumference prepregs. Furthermore, in the present invention, it is unnecessary to perform prepreg-butting operation. Thus, the shaft of the present invention can be manufactured in a higher productivity than the conventional shaft.

Preferably, the unintegral turns of the fiber reinforced resinous layers wound by more than 1 (one turn) is $N+0.5$ (N is an integer more than 1). The way of winding the prepreg allows a part in which the prepreg is wound by 0.5 turns to be anisotropic efficiently.

According to the present invention, there is provided a golf club shaft having a first inclined fiber reinforced resinous layer in which reinforcing fibers are oriented at an angle of α° ($0^\circ < \alpha < 90^\circ$) with respect to an axis of the golf club shaft and a second inclined fiber reinforced resinous layer in which reinforcing fibers are oriented at an angle of $-\alpha^\circ$ with respect thereto and which is adjacently layered in a winding state at one portion or more of the golf club shaft, wherein a winding start position of the first inclined fiber reinforced resinous layer and a winding start position of the second inclined fiber reinforced resinous layer are spaced at 180° in a circumferential direction of the golf club shaft; and the first inclined fiber reinforced resinous layer and the second inclined fiber reinforced resinous layer are wound by $N+0.5$ turns (N is an integer more than 1), respectively,

In the above construction in which the reinforcing fibers are adjacently layered one on the other and incline in opposite directions, the semi-circumference region of one of the first and second inclined fiber reinforced resinous layers at the winding termination side thereof and the semi-circumference region of the other of the first and second inclined fiber reinforced resinous layers at the winding termination side thereof are positioned in a first

circumference region ($0^{\circ} \leq \theta < 180^{\circ}$) of the shaft and a second circumference region ($180^{\circ} \leq \theta < 360^{\circ}$) thereof, respectively. Similarly, the semi-circumference region of one of the first and second inclined fiber reinforced resinous layer at the winding start side thereof and the semi-circumference region of the other of the first and second inclined fiber reinforced resinous layers at the winding termination side thereof are positioned in the first circumference region ($0^{\circ} \leq \theta < 180^{\circ}$) of the shaft and the second circumference region ($180^{\circ} \leq \theta < 360^{\circ}$) thereof, respectively. Consequently, it can be the that the construction is substantially same as the construction in which the semi-circumference prepregs whose reinforcing fibers incline in the opposite directions are wound on the first circumference region ($0^{\circ} \leq \theta < 180^{\circ}$) of the conventional anisotropic shaft and the second circumference region ($180^{\circ} \leq \theta < 360^{\circ}$) thereof, respectively. Thus, the shaft having the construction is flexed and twisted.

In the golf club shaft of the present invention, because the semi-circumference prepreg is not used, there is no seam formed between the semi-circumference prepregs. Thus, the shaft of the present invention has a higher degree of strength than the conventional anisotropic shaft which is composed of the semi-

circumference prepregs. Further, because the prepreg of the present invention has one circumference or more, i.e., it is wound by one turn or more, the number of the prepregs of the shaft of the present invention is smaller than that of the prepregs of the conventional anisotropic shaft formed of the semi-circumference prepregs. Furthermore, in the present invention, it is unnecessary to perform prepreg-butting operation. Thus, the shaft of the present invention can be manufactured in a higher productivity than the conventional shaft.

In manufacturing the golf club shaft of the present invention, prepregs composing the first inclined fiber reinforced resinous layer and the second inclined fiber reinforced resinous layer are bonded to each other, by dislocating at 180° , from each other, ends of the respective two prepregs at a winding start side thereof before prepregs are wound on the mandrel, such that when the two prepregs are wound on the mandrel, winding start positions of the two prepregs are dislocated at 180° in a circumferential direction of the mandrel. Then, the two prepregs bonded to each other are wound on the mandrel. According to the method, it is possible to decrease a number of winding prepregs separately on the mandrel and thus improve the productivity of the shaft.

In the present invention, as reinforcing fibers of the

fiber reinforced resin, it is possible to use a glass fiber, a carbon fiber, various organic fibers, an alumina fiber, a silicon carbide fiber, metal fiber and/or fibers consisting of a mixture of these fibers, a woven cloth or a mat. As resin, it is possible to use polyamide, epoxy, polyester, and the like.

It is possible to form the golf club shaft of only the fiber reinforced resinous layer. Further, it is possible to use an unanisotropic layer such as a fiber reinforced rubber layer and a rubber layer having an orientation in combination with the fiber reinforced resinous layer. In addition, it is possible to use a resin layer or rubber layer not containing fiber at a part of the golf club shaft.

The anisotropic part which allows the shaft to flex and twist may be provided partly thereon in its axial direction. That is, the anisotropic part may be provided on the shaft entirely or partly in its axial direction.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a development view of a prepreg constituting a shaft of a first embodiment.

Fig. 2 shows a winding state of the prepreg constituting the shaft of the first embodiment.

Fig. 3 is a development view of a prepreg constituting a shaft of a second embodiment.

Fig. 4 shows a winding state of the prepreg

constituting the shaft of the second embodiment.

Fig. 5 shows a bonding state of prepregs shown in Fig. 3.

Fig. 6 is a development view of a prepeg constituting a shaft of a first comparison example.

Fig. 7 shows a winding state of the prepeg constituting the shaft of the first comparison example.

Fig. 8 is a development view of a prepeg constituting a shaft of a second comparison example.

Fig. 9 shows a winding state of the prepeg constituting the shaft of the second comparison example.

Fig. 10 is a development view of a prepeg constituting a shaft of a third comparison example.

Fig. 11 shows a winding state of the prepeg constituting the shaft of the third comparison example.

Figs. 12A and 12B are side views showing a method of measuring a twist amount of a golf club shaft of the embodiment and the comparison examples.

Fig. 13 shows a three-point bending strength test.

Fig. 14 shows a twist failure strength test.

Fig. 15 is a schematic view showing the relationship between an elastic main axis and a geometric main axis of an anisotropic hollow shaft.

Fig. 16A is a side view showing a state in which a load is applied to an anisotropic hollow shaft.

Fig. 16B is a schematic view showing a deformational behavior of an anisotropic hollow shaft.

Detailed Description of the Embodiment

The embodiment of the present invention will be described below with reference to the drawings. In the drawings, prepregs are shown at short length compared with an actual length.

Figs. 1 and 2 show developed and wound states of a prepreg (fiber reinforced resinous layer) constituting a shaft of the first embodiment. Figs. 3 through 5 show developed and wound states of a prepreg constituting a shaft of the second embodiment.

Figs. 6 and 7 show developed and wound states of a prepreg (fiber reinforced resinous layer) constituting a shaft of a first comparison example. Figs. 8 and 9 show developed and wound states of a prepreg constituting a shaft of a second comparison example. Figs. 10 and 11 show developed and wound states of a prepreg constituting a shaft of a third comparison example.

Numerical values attached to each prepreg in Figs. 1, 3, 5, 6, 8, and 10 indicate the orientation angle of the reinforcing fiber of the prepreg with respect to the axis of each shaft. 0.5P, 1P, 1.5P, 2P, 3P, and 3.3P attached to the right side of each prepreg indicate the number of turns (number of circumferences) of each prepreg. That is,

0.5P, 1P, 1.5P, 2P, 3P, and 3.3P indicate 0.5 turns, 1 turn, 1.5 turns, 2 turns, 3 turns and 3.3 turns. A triangular prepreg sheet shown at the lowermost position indicates a reinforcing prepreg sheet to be wound on a small diameter-end of each shaft on which a club head is installed.

Prepreg sheets which are used in the embodiments and the comparison examples and whose reinforcing fibers had orientation angles of 0° , -45° , $+45^\circ$ are all carbon fiber reinforced resin prepreg 8055S-12 manufactured by Toray Corp (thickness: 0.1053mm, content of carbon fiber: 76wt%, CF tensile modulus of elasticity: 30,000kg, and CF tensile strength: 560kg). A prepreg sheet (corresponding to hoop layer disclosed in Japanese Laid-Open Patent Publication No. 11-76480) which is used in only the third comparison example and whose reinforcing fiber had an orientation angle of 90° is prepreg 805-3 manufactured by Toray Corp (thickness: 0.0342mm, content of carbon fiber: 60wt%, CF tensile modulus of elasticity: 30,000kg, and CF tensile strength: 410kg).

The shaft of the first comparison example (Figs. 6 and 7) is not anisotropic, and each of prepregs 16a - 16c is wound at an integral turns more than one turn. The prepreg-winding start (termination) positions of the prepregs 16a - 16c are different from one another to

prevent the section of the shaft from becoming uncircular. The shaft doesn't have an anisotropic layer part formed thereon. Thus, supposing that an axis perpendicular to the axis of the shaft is set at every portion in the axial direction of the shaft, the reinforcing fiber is oriented identically at both sides of the axis perpendicular to the axis of the shaft.

The shaft of the second comparison example (Figs. 8 and 9) is an anisotropic shaft as disclosed in Japanese Laid-Open Patent Publication No. 10-328338, and prepregs 18a and 18b are wound by two turns by differentiating the winding start positions thereof from each other by 180° in the circumferential direction of the shaft. The orientation of the reinforcing fiber of the prepreg 18c wound in a first semi-circumference region ($0^\circ \leq \theta < 180^\circ$) of the circumferential direction of the shaft is different from that of the reinforcing fiber of the prepreg 18d wound in a second semi-circumference region ($180^\circ \leq \theta < 360^\circ$) of the circumferential direction thereof. Similarly, the orientation of the reinforcing fiber of the prepreg 18e wound in a first semi-circumference region ($0^\circ \leq \theta < 180^\circ$) of the circumferential direction of the shaft is different from that of the reinforcing fiber of the prepreg 18f wound in a second semi-circumference region ($180^\circ \leq \theta < 360^\circ$) of the circumferential direction thereof.

A prepreg sheet 18g is wound by three turns as an outermost layer of the shaft.

The shaft of the third comparison example (Figs. 10 and 11) is an anisotropic shaft as disclosed in Japanese Laid-Open Patent Publication No. 11-76480. Prepregs 20a and 20b are added to the prepreg-winding construction of the shaft of the first comparison example (Figs. 6 and 7). That is, the prepregs 20a and 20b correspond to the hoop layer described in Japanese Laid-Open Patent Publication No. 11-76480. The prepreg 20a and the prepreg 20b are wound by one turn, respectively. After prepregs 18c and 18d are bonded to the prepreg 20a, the prepregs 18c, 18d, and 20a combined with one another is layered on the prepreg 18b. After prepregs 18e and 18f are bonded to the prepreg 20b, the prepregs 18e, 18f, and 20b combined with one another was layered on the prepreg 18d.

In the first embodiment (Figs. 1 and 2), a prepreg 1a and 1b are wound with 3.3 turns. The prepregs 1a and 1b are wound by differentiating winding start positions thereof from each other by 180° in the circumferential direction of the shaft. A prepreg 1c is wound by three turns on the prepreg 1b as an outermost layer of the shaft. A part 1A (thick part) of the prepreg 1b having a length 0.3 of one turn positioned at the winding termination side is formed as an anisotropic part. That is, owing to the

presence of the part 1A having the length 0.3 of one turn of the prepreg 1b, the orientation state of the reinforcing fiber of the shaft is partly changed in the circumferential direction of the shaft and also changed at least one part thereof in its thickness direction.

In the second embodiment (Figs. 3 and 4), each of prepregs 3a, 3b, 3c, and 3d is wound by 1.5 turns and wound by differentiating winding start positions thereof by 180° from one another in the circumferential direction of the shaft. A prepreg 3e is layered by three turns on the prepreg 3d as an outermost layer. A part 3A (thick line part) of the prepreg 3a and a part 3B (thick line part) of the prepreg 3b having a length 0.5 of one turn at the winding termination side are positioned at a semi-circumference region ($0^\circ \leq \theta < 180^\circ$) and a circumference region ($180^\circ \leq \theta < 360^\circ$), respectively. The reinforcing fiber of the prepreg 3a and that of the prepreg 3b are opposite to each other in the orientations thereof. Similarly, a part 3C (thick line part) of the prepreg 3c and a part 3D (thick line part) of the prepreg 3d having a length 0.5 of one turn at the winding termination side are positioned at a semi-circumference region ($0^\circ \leq \theta < 180^\circ$) and a circumference region ($180^\circ \leq \theta < 360^\circ$), respectively. The reinforcing fiber of the prepreg 3c and that of the prepreg 3d are opposite to each other in the

orientations thereof. In winding the prepregs 3a and 3b on the mandrel, the part of 0.5 turns of each thereof are bonded to each other to prepare one prepreg sheet. Then, one prepreg sheet is wound on the mandrel. Similarly, in winding the prepregs 3c and 3d on the mandrel, the part of 0.5 turns of each thereof is bonded to each other to prepare one prepreg sheet. Then, one prepreg sheet is wound on the mandrel.

Static twist amounts in bending (indicating the degree of twist anisotropy), three-point bending strengths, twist failure strengths, and work time periods required to produce one shaft were measured on shafts of the comparison examples and the embodiments. Table 1 shows the result.

The static twist amounts in bending (indicating the degree of twist anisotropy), the three-point bending strengths, the twist failure strengths, and the work time periods required to produce one shaft were measured by the following methods.

(Static twist amounts in bending)

As shown in Fig. 12, a shaft S was held by a chucking device 200 which chucked a portion of the shaft S spaced at 150mm from an end 100a at a grip part side of the shaft S, with the shaft S held horizontally. The center of a metal wire 50 having a length of 140mm was bonded to the upper

surface of the shaft S at a position thereof which was spaced by 98% of the entire length of the golf club from the end S-a thereof such that the metal wire 50 was horizontal and perpendicular to the axis of the shaft S. A weight 51 having a weight of 1.1kg was hung from the shaft S at the lower end surface of the position spaced by 98% of the entire length of the golf club from the end S-a of the shaft S. The twist amount of the shaft S before and after the load of the weight 51 was applied to the shaft S was measured by a rotation angle (θ) of the metal wire 50.

(Three-point bending strength)

A test was conducted in accordance with "(1) three-point bending test of strength of 4.C type shaft" of "admittance standard of golf club shaft and method of checking standard (CPSA0098)" of Product Safety Association.

That is, as shown in Fig. 13, a shaft S was supported by a pair of supporting tools 500 in a predetermined span L_{13} . A load (W) was applied to a center position between the supporting tools 500 to measure a load value when the shaft S was destroyed. The measured load value was set as an evaluation value. The result is shown in table 1.

The length of the shaft S was 1143mm. Load-applied points were T (spaced at 90mm from the end of the shaft at its small-diameter side), A (spaced at 175mm from

the end of the shaft at its small-diameter side), B (spaced at 525mm from the end of the shaft at its small-diameter side), and C (spaced at 175mm from the end of the shaft at its large-diameter side). When the load-applied point was T, the span L_{13} was set to 150mm. When the load-applied points were A, B, and C, the span L_{13} was set to 300mm.

(Twist failure strength)

A test was conducted in accordance with "2. twist test" of "admittance standard of golf club shaft and method of checking standard (CPSA0098)" of Product Safety Association.

As shown in Fig. 14, both end portions of a shaft S having a length of 50mm were fixed by a fixing jig 600. A twist torque was applied to the shaft S until the shaft S was destroyed. A product of a torque value and a twist angle when the shaft S was destroyed was set as an evaluation value. The result is shown in table 1.

(Work time period required to produce one shaft)

A period of time for producing 10 shafts of each of the comparison examples and the embodiments was measured. That is, a period of time (for 10 shafts) required to cut prepreg materials into prepregs having a predetermined dimension and a period of time (for 10 shafts) required to wind prepregs on mandrels and form

the shafts by molding were added to each other. An evaluation value was determined by dividing the total period of time by 10.

Table 1

	Static Amount in Bending (°)	T	Three-Point Bending Failure Strength (Kg)			Twist Failure Strength (Nm degree)	Winding Time Period (minute)
Comparison Example 1	0	125	70	73	72	2330	2.7
Comparison Example 2	2.5	125	54	50	49	1098	4.7
Comparison Example 3	2.5	124	62	58	58	1109	4.0
Embodiment 1	0.8	129	72	75	73	2410	2.7
Embodiment 2	2.5	125	72	75	74	2211	3.2

As shown in table 1, the shaft of the first embodiment was 0.8 in its static twist amount, then the shaft had anisotropic. As shown in Fig. 1, the shaft of the first embodiment had four prepregs layered one upon another, a number of prepregs is as same as that of the shaft (Fig. 6) of the first comparison example. The difference between both shafts is that in the shaft of the first comparison example, the prepreg (inclined fiber reinforced resinous layer) 16a in which the reinforcing fiber oriented by $+45^\circ$ with respect to the axis of the shaft is wound at a plurality of integral turns (three turns), whereas in the shaft of the first embodiment, the prepreg (inclined fiber reinforced resinous layer) 1a in which the reinforcing fiber oriented by $+45^\circ$ with respect to the axis of the shaft is wound at a plurality of unintegral turns (3.3 turns). As shown in table 1, the productivities (prepreg-winding period of time) of both shafts are equal to each other and very favorable, and the strengths thereof are also almost equal to each other and high. By comparing both shafts with each other, it is understood that in the first embodiment, it is possible to provide an anisotropic shaft having the same degree of productivity and strength as those of the conventional unisotropic shaft and not having a seam formed between prepregs.

It is understood that the shaft of the second

embodiment and the shaft of each of the second and third comparison examples are in the same anisotropic state (static twist amount in bending: 2.5). That is, the parts 3A and 3B (thick line part) of each of the prepregs 3a and 3b having a length 0.5 of one turn at the winding termination side were positioned in the region ($0^\circ \leq \theta < 180^\circ$) and the region ($180^\circ \leq \theta < 360^\circ$), respectively in the circumferential direction of the shaft. The reinforcing fiber of the prepreg 3a and that of the prepreg 3b were opposite to each other in the orientations thereof. Similarly, the parts 3C and 3D (thick line part) of each of the prepregs 3c and 3d having a length 0.5 of one turn at the winding termination side which were positioned in the region ($0^\circ \leq \theta < 180^\circ$) and the region ($180^\circ \leq \theta < 360^\circ$), respectively. The reinforcing fiber of the prepreg 3c and that of the prepreg 3d were opposite to each other in the orientations thereof. The prepregs 3a and 3b, and the prepregs 3c and 3d have a function similar to that of the anisotropic layer (prepreg 18c and prepreg 18d) of the shaft of the second comparison example and that of the anisotropic layer (prepreg 18e and prepreg 18f) of the shaft of the third comparison example.

The shaft of the third comparison example has a higher degree of strength than the shaft of the second comparison example because the former has the hoop layer

(prepregs 20a and 20b) provided thereon. The shaft of the second embodiment has a higher degree of strength than the shaft of the third comparison example. The shaft of the third comparison example has a higher degree of productivity than the shaft of the second comparison example. This is because in the former, the prepregs 18c and 18d are wound after they are bonded to each other on the hoop layer (prepreg 20a), and the prepregs 18e and 18f are wound after they are bonded to each other on the hoop layer (prepreg 20b). The number of the prepregs of the shaft of the second embodiment is smaller than that of the prepregs of the shaft of the third comparison example. Further, in the second embodiment, it is unnecessary to perform semi-circumference prepreg-butting operation. Thus, the shaft of the second embodiment can be manufactured in a shorter time period than the shaft of the third comparison example.

As it is apparent with above description, the present invention can obtain an anisotropic golf club shaft without using semi-circumference prepreg, then the anisotropic golf club shaft of the present invention has a higher degree of strength and productivity than the conventional anisotropic golf shaft.

Further, a face of a club head installed on the end of the anisotropic golf shaft is oriented to a specific

direction owing to twisting of the shaft at a desired angle caused by flexure thereof when the golf club is swung, therefore the anisotropic golf shaft is preferable for the hooker and slicer.

WHAT IS CLAIMED IS:

1. A golf club shaft having a plurality of fiber reinforced resinous layers which are layered one upon another in a winding state,

wherein one or more layers of said layers are inclined fiber reinforced resinous layers in which reinforcing fibers are oriented at angles not 0° and 90° with respect to an axis of said golf club shaft and, at least one layer of said inclined fiber reinforced resinous layers is wound by an unintegral turns more than one turn so as to apply an anisotropic property to the shaft.

2. The golf club shaft according to claim 1, wherein the unintegral turns of said fiber reinforced resinous layers wound by more than one turn is $N+0.5$, where N is an integer more than 1.

3. The golf club shaft according to claim 1, wherein the inclined fiber reinforced resinous layers are a first inclined fiber reinforced resinous layer in which reinforcing fibers are oriented at an angle of α° ($0^\circ < \alpha < 90^\circ$) with respect to an axis of said golf club shaft and a second inclined fiber reinforced resinous layer in which reinforcing fibers are oriented at an angle of $-\alpha^\circ$ with respect thereto, and the second inclined fiber reinforced resinous layer is adjacently layered on said first inclined fiber reinforced resinous layer in a winding state at one

portion or more, and a winding start position of said first inclined fiber reinforced resinous layer and a winding start position of said second inclined fiber reinforced resinous layer are spaced at 180° in a circumferential direction of said golf club shaft; and said first inclined fiber reinforced resinous layer and said second inclined fiber reinforced resinous layer are wound by $N+0.5$ turns, respectively where N is an integer more than one.

4. The golf club shaft according to claim 3, wherein the first fiber reinforced resinous layer and the second fiber reinforced resinous layer are bonded to form one prepreg sheet.

5. The golf club shaft according to claim 1, wherein a part of the inclined fiber resinous layer corresponding to decimal turns obtained by substructing integral turns from the unintegral turns forms an anisotropic region and an angle of the reinforcing fiber of the anisotropic region is different from that of other region in a circumferential direction of the shaft.

6. The golf club shaft according to claim 5, wherein the anisotropic property is applied to the shaft by the anisotropic region, so that the shaft is twisted by a flexure thereof when the shaft is swung.

7. The golf club shaft according to claim 6, wherein a face of a club head installed on the shaft is oriented to a

direction, in which a golf ball hit by a hooker or a slicer is to be flid, owing to twisting of the shaft.

8. The golf club shaft according to claim 1, wherein one or more of said fiber reinforced resinous layers have reinforcing fiber whose orientation angle is 90° and/or 0° with respect to the axis of the shaft.

9. The golf club shaft according to claim 1, wherein the fiber reinforced resinous layers are composed of prepreg sheets.

ABSTRACT OF THE DISCLOSURE

At least one layer of inclined prepregs whose reinforcing fiber is oriented at angles not 0° and 90° with respect to an axis of a golf club shaft is wound by an unintegral turns more than zero at at least one part of the golf club shaft in an axial direction thereof. A part of the prepreg(s) corresponding to decimal turns obtained by subtracting integral turns from the unintegral turns forms an anisotropic region. In this manner, it is possible to obtain an anisotropic shaft in which the angle of the reinforcing fiber is partly different from that of other parts in the circumferential direction of the shaft and further, at at least one part in the thickness direction thereof.

Fig. 1




Fig. 2




Fig. 3

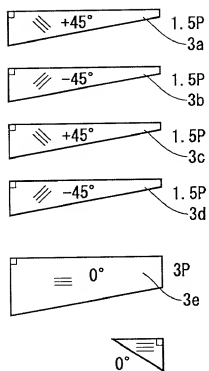


Fig. 4




Fig. 5




Fig. 6




Fig. 7




Fig. 8

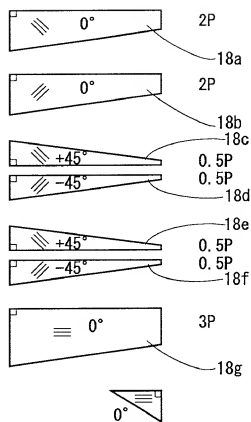


Fig. 9

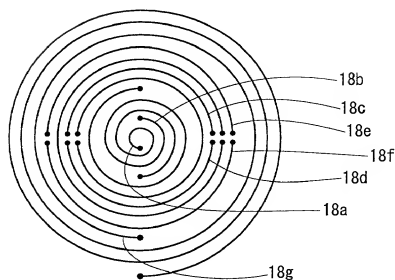


Fig. 10

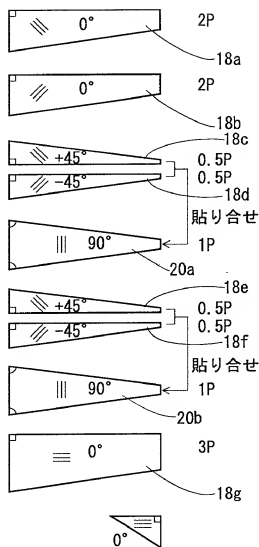


Fig. 11


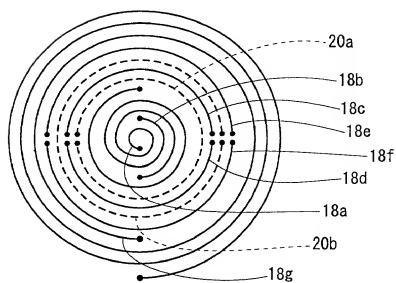


Fig. 12

(A)

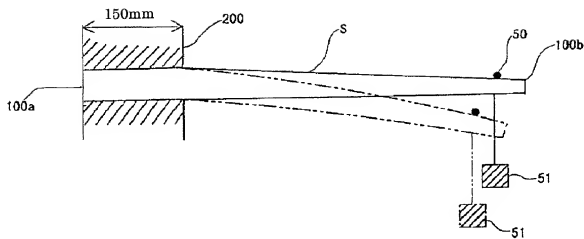

(B)




Fig. 13




Fig. 14




Fig. 15






Fig. 16

(A)



(B)



BIRCH, STEWART, KOLASCH & BIRCH, LLP

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

COMBINED DECLARATION AND POWER OF ATTORNEY

ATTORNEY DOCKET NO.

2927-103P

FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title:

GOLF CLUB SHAFT

Fill in Appropriate
Information -
For Use Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
United States Application Number _____; and /or

the specification was filed on _____ as PCT
International Application Number _____; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority
Information:
(if appropriate)

Prior Foreign Application(s)

10-109942

Japan

04/20/98

Priority Claimed

(Number)

(Country)

(Month/Day/Year Filed)

Yes

No

(Number)

(Country)

(Month/Day/Year Filed)

Yes

No

(Number)

(Country)

(Month/Day/Year Filed)

Yes

No

(Number)

(Country)

(Month/Day/Year Filed)

Yes

No

(Number)

(Country)

(Month/Day/Year Filed)

Yes

No

Insert Provisional
Application(s):
(if any)

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Insert Requested
Information:
(if appropriate)

Country

Application No.

Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Insert Prior U.S.
Application(s):
(if any)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status - patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Terrell C. Birch	(Reg. No. 19,382)	Raymond C. Stewart	(Reg. No. 21,066)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,580)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,580)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,380)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Andrew F. Reish	(Reg. No. 33,443)
C. Joseph Faraci	(Reg. No. 32,350)	Donald J. Daley	(Reg. No. 34,313)

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole
Inventor:
Insert Name of Inventor
Insert Date This
Document is Signed

Insert Residence
Insert Citizenship

Insert Post Office
Address

Full Name of Second
Inventor, if any

see above

Full Name of Third
Inventor, if any

see above

Full Name of Fourth
Inventor, if any

see above

Full Name of Fifth
Inventor, if any

see above

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Norio	SUMITOMO	<i>Norio Sumitomo</i>	April 16, 1999
Residence (City, State & Country)		CITIZENSHIP	
Hyogo, Japan		Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
643 1-1306, Higashitatemichi, Futatabi-cho, Akashi-shi, Hyogo, Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Masahide	ONUKI	<i>Masahide Onuki</i>	April 16, 1999
Residence (City, State & Country)		CITIZENSHIP	
Hyogo, Japan		Japan	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
122-2, Shimobishino, Bessho-cho, Miki-shi, Hyogo, Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			